

Supercom 327

Radio Module for Ei Electronics® smoke alarms



Application

The radio module **Supercom 327** enables distant check of installed smoke alarms, and thereby could save costly inspections. The radio module is suitable for the following Ei Electronics® smoke alarm:

- Ei650FA

Thanks to the unidirectional radio system Wireless M-Bus (OMS), it is possible to readout the stored data in the radio module via a mobile radio modem or via a radio concentrator. The radio module can be retrofitted at any time without impairing the functioning of the smoke alarm.

Function

The battery-operated radio module **Supercom 327**, plugged into an Ei Electronics smoke alarm, stores status information of the smoke alarm. The stored data can be read out via the unidirectional radio communication Wireless M-Bus (OMS) within the reception area of the readout device.

Parametrisation

Following parameters can be parametrised Ex Works:

- Date and time
- Password
- Automatic self-test (date and time of the event)
- Radio transmission interval and radio transmission calendar
- Commissioning (automatic or by button)
- AES-128 encryption

Readout

Following parameters can be read out by radio with the software Tools Supercom:

- Smoke events (number and date of the last event)
- Battery status, dust level and sensor status
- Head removals (number, duration and date of the last event)
- Button tests (number and date of the last event)
- Date of the last self-test
- Date and time
- Commissioning date
- Module removals (number, duration and date of the last event)

Operating Mode

The radio module **Supercom 327** sends the data of the smoke alarm every 120 seconds (minimum), 12 hours a day, and 7 days a week.

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Астана +7(7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395) 279-98-46
Киргизия (996)312-96-26-47

Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Казахстан (772)734-952-31

Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Россия (495)268-04-70

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Technical Data

General

Operating temperature	0 °C to 40 °C
Storage temperature	-10 °C to 60 °C
Humidity range	15 % to 95 % RH non condensing

Radio

Frequency	868.95 MHz
Output power	max. 12.5 mW
Encryption	AES-128
Transmission standard	EN 13757-4, mode T1
OMS (Open Metering System)	acc. to OMS generation 4, mode 5

Conformity



acc. to RED 2014/53/EU

Data Memory

Flash memory	non-volatile storage
--------------	----------------------



Power Supply

Main supply	3 V lithium battery
Lifespan	typically 10 + 1 years

Dimensions

Radio module	58.8 mm x 29.85 mm x 34 mm
Smoke alarm	115 mm (D) x 50 mm (H)

Readout Example

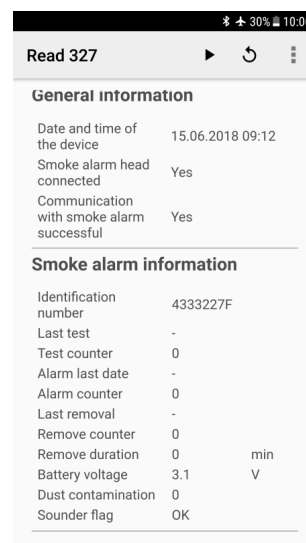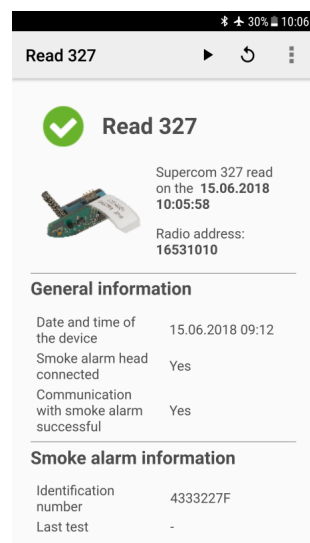

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Астана +7(7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395) 279-98-46
Киргизия (996)312-96-26-47

Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Казахстан (772)734-952-31

Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Россия (495)268-04-70

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93