


Supercom 636 Radio Modem

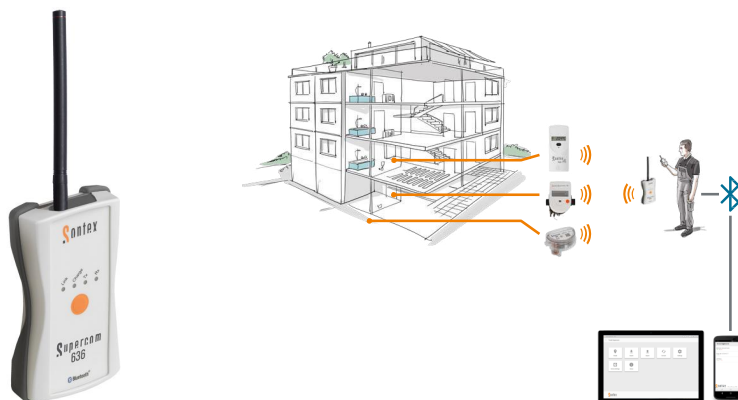

Application

The Supercom 636 radio modem is a transceiver (433 MHz) designed to remotely read out SONTEX radio devices. Thanks to its Bluetooth interface, it can easily connect to:

- An Android or Windows tablet
- An Android smartphone
- A Windows laptop

A meter reader, equipped with a Supercom 636 radio modem and a tablet (for example), can easily read out SONTEX radio devices without having to enter residences. Access to the property allows one to read out each device several times a year, if necessary.

In addition to the readout, the Supercom 636 radio modem allows the configuration of each device, thanks to the Tools Supercom software. The latter, equipped with an intuitive interface, makes data processing simple and fast. These can easily be integrated into a billing system.

Functions

- Remote readout of SONTEX radio devices (433 MHz).
- Remote configuration of SONTEX radio devices (433 MHz).

Features

- 433 MHz transceiver.
- Meets EN 60870-5.
- Class 2 Bluetooth interface (10 m).
- In accordance to 2014/53/EU (RED).
- External antenna improving transmission / reception performance.
- Compact design for a better grip.
- Robust and shock resistant industrial housing.
- Easy to use thanks to the integrated belt clip.
- Protection class IP 65.
- Rechargeable via USB.

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
 Астана +7(7172)727-132
 Астрахань (8512)99-46-04
 Барнаул (3852)73-04-60
 Белгород (4722)40-23-64
 Брянск (4832)59-03-52
 Владивосток (423)249-28-31
 Волгоград (844)278-03-48
 Вологда (8172)26-41-59
 Воронеж (473)204-51-73
 Екатеринбург (343)384-55-89
 Иваново (4932)77-34-06
 Ижевск (3412)26-03-58
 Иркутск (395) 279-98-46
 Киргизия (996)312-96-26-47

Казань (843)206-01-48
 Калининград (4012)72-03-81
 Калуга (4842)92-23-67
 Кемерово (3842)65-04-62
 Киров (8332)68-02-04
 Краснодар (861)203-40-90
 Красноярск (391)204-63-61
 Курск (4712)77-13-04
 Липецк (4742)52-20-81
 Магнитогорск (3519)55-03-13
 Москва (495)268-04-70
 Мурманск (8152)59-64-93
 Набережные Челны (8552)20-53-41
 Нижний Новгород (831)429-08-12
 Казахстан (772)734-952-31

Новокузнецк (3843)20-46-81
 Новосибирск (383)227-86-73
 Омск (3812)21-46-40
 Орел (4862)44-53-42
 Оренбург (3532)37-68-04
 Пенза (8412)22-31-16
 Пермь (342)205-81-47
 Ростов-на-Дону (863)308-18-15
 Рязань (4912)46-61-64
 Самара (846)206-03-16
 Санкт-Петербург (812)309-46-40
 Саратов (845)249-38-78
 Севастополь (8692)22-31-93
 Симферополь (3652)67-13-56
 Россия (495)268-04-70

Смоленск (4812)29-41-54
 Сочи (862)225-72-31
 Ставрополь (8652)20-65-13
 Сургут (3462)77-98-35
 Тверь (4822)63-31-35
 Томск (3822)98-41-53
 Тула (4872)74-02-29
 Тюмень (3452)66-21-18
 Ульяновск (8422)24-23-59
 Уфа (347)229-48-12
 Хабаровск (4212)92-98-04
 Челябинск (351)202-03-61
 Череповец (8202)49-02-64
 Ярославль (4852)69-52-93

Technical specifications

Operating temperature	5 to 55 °C
Storage temperature	-10 to 55 °C (dry environment)
Power supply	3.6 VDC (3 AAA NiMH batteries)
USB charger	230 VAC and 12 VDC
Housing dimensions	69 x 122 x 25 mm
Antenna size	142 mm
Weight	0.180 kg
Protection class	IP 65

Standards

Standard
CE conformity

Bluetooth communication

Power class	Class 2
Maximum Power	3 dBm
Typical range	10 m

Radio communication

Communication	Bi-directional
Frequency	433.82 MHz
Modulation	FSK
Radio Protocol	Radian 0
ERP	10 mW

Note

The housing of the radio modem Supercom 636 is protected against unauthorised intervention. Only authorised persons may open the housing. Any unauthorised intervention voids the warranty.

Scope of delivery



По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Астана +7(7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395) 279-98-46
Киргизия (996)312-96-26-47

Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Казахстан (772)734-952-31

Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Россия (495)268-04-70

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93