

Radio module for Elster water meter



Application

Radio module **Supercom 580** to retrofit for the Elster multi-jet meter MO-A and MOZ-A as well as for the Elster-Picoflux-water meter EV-A.

The retrofit radio module for water meters can be retrofitted at any time without impairing the calibration. The bidirectional SONTEx radio system allows the readout of the consumption data via a mobile radio modem Supercom 636 or via the radio concentrator Supercom 646.

For the Elster multi-jet meters MO-A and MOZ-A, various housings for all types of pipe connections for flush or surface mounting and for valve connection are available. The great variety of adapters for installations from different manufacturers allows a cost-effective change-over to this technology at all metering points.

Function

The battery-operated radio module **Supercom 580** scans the volume pulses of the water meter, accumulates them and stores the consumption data.

The radio module is equipped with a manipulation protection. If the housing of the radio module is removed and / or opened, the electronic manipulation protection triggers an error message.

Stored Data

- Identification number (serial number of water meter)
- Medium: cold or warm water
- Serial number (radio module)
- Current time and date
- Accumulated volume
- 15 monthly values
- Operating hours of battery
- Manipulation protection; date of the last manipulation and the accumulated duration of all manipulations in minutes
- Magnetic contact detection in minutes and with date of the last magnetic contact detection
- Pulse value
- Number of counter resets

Programming data

With the software Tools Supercom following parameters can be programmed:

- Water meter ID and medium: cold or warm water
- Current date and time
- Initialisation of the totalizer and of the 15 monthly values
- Reset to delivery (sleeping) mode or set to operating mode

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Астана +7(7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395) 279-98-46
Киргизия (996)312-96-26-47

Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Казахстан (772)734-952-31

Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Россия (495)268-04-70

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Technical Data

General

Pulse value	0.5 l/Imp
Operating temperature	5 to 55°C
Storage temperature	-20 to 70°C

Housing

Protection class	IP65
------------------	------

Conformity



acc. to RED 2014/53/EU

Radio

Method	FSK, bidirectional
Frequency	433.82 MHz
Protocol	Radian, EN60870-5 (M-Bus)
Baud rate	2'400 Baud
Range	approx. 30 m, depending on building structure

Data Memory

EEPROM (captive)	daily recording
------------------	-----------------


Electronic Data

Main supply	Lithium Metal Battery (≤ 1g) 3VDC
Service life	Maximum 10 years

Optical Interface

Protocol	EN60870-5 (M-Bus)
Baud rate	2'400 Baud

Dimensional Drawing

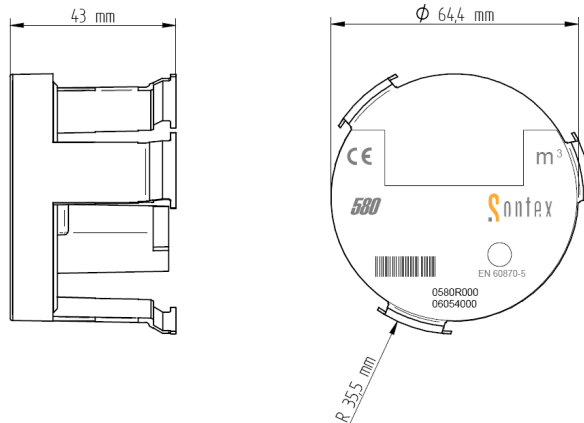

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Астана +7(7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395) 279-98-46
Киргизия (996)312-96-26-47

Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Казахстан (772)734-952-31

Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Россия (495)268-04-70

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93